




# MacBook Air 11" Mid 2013 Battery Replacement

Prereq for removing the battery with the fan out.


Written By: Walter Galan

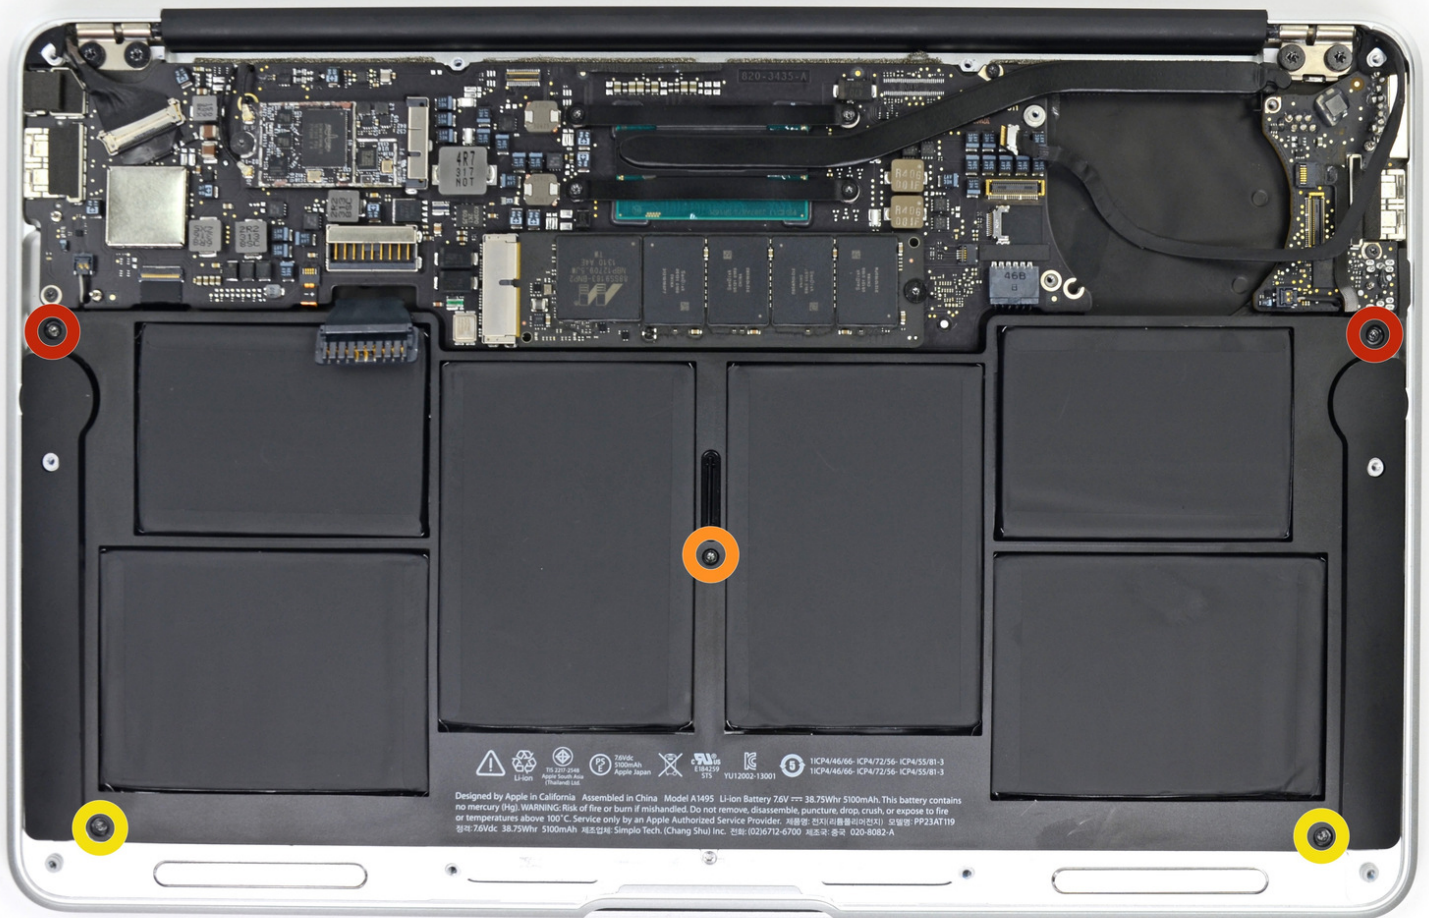

## INTRODUCTION


Prereq for removing the battery with the fan out.

## Step 1 — Battery

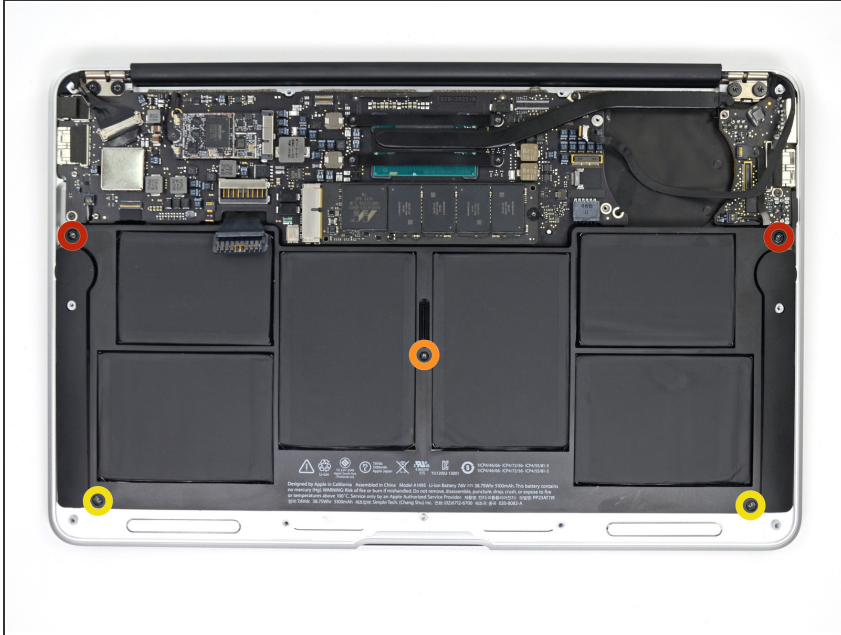

- Remove the following five screws securing the battery to the upper case:
  - Two 5.2 mm T5 Torx screws
  - One 6 mm T5 Torx screw
  - Two 2.6 mm T5 Torx screws

## Step 2

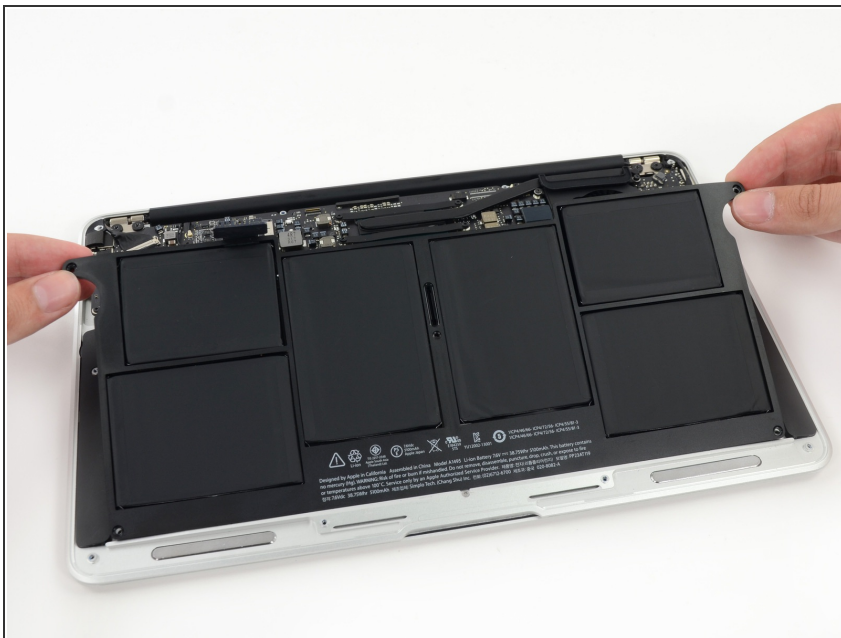

- ⚠ When handling the battery, avoid squeezing or touching the six exposed lithium polymer cells.
- Lift the battery from its edge nearest the logic board and remove it from the upper case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 12:04:11 AM.